

# ELITE


## Power of the infinite

Uniquely scalable luminaires that  
spread the light without caring  
for boundaries.




# Glare Free

The cutting-edge technology that controls and guides light with precision to avoid excessive and immoderate brightness, which can be disabling or simply uncomfortable.

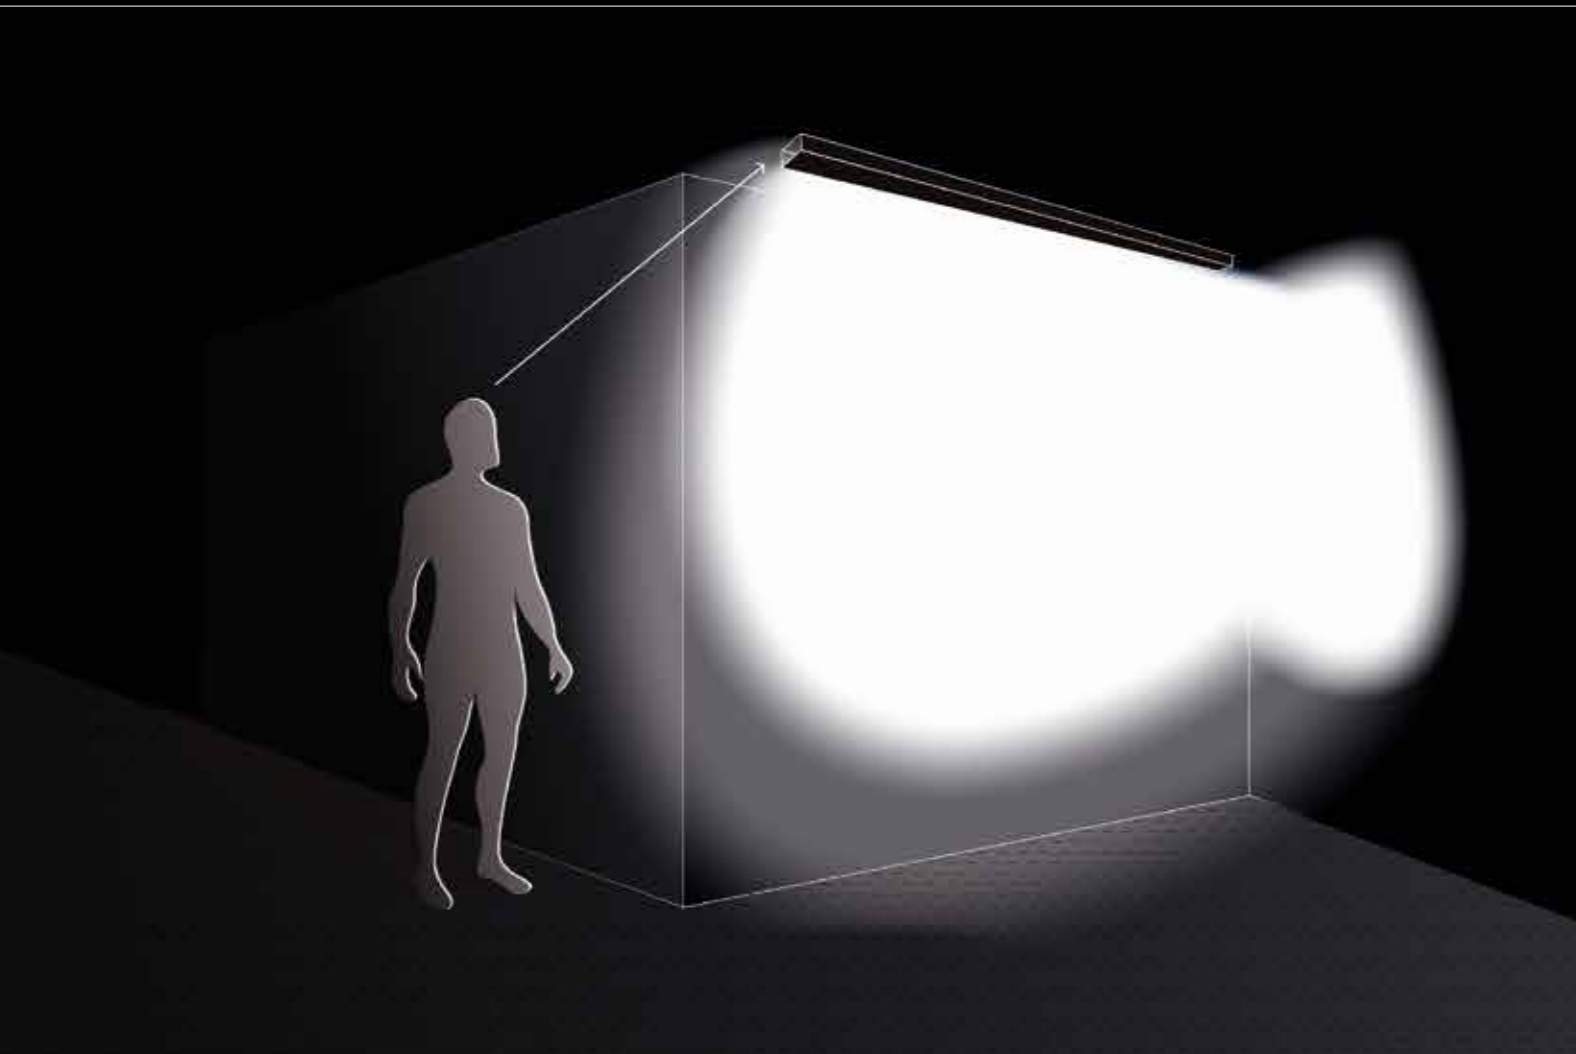

Normal  
Vertical Cut-off

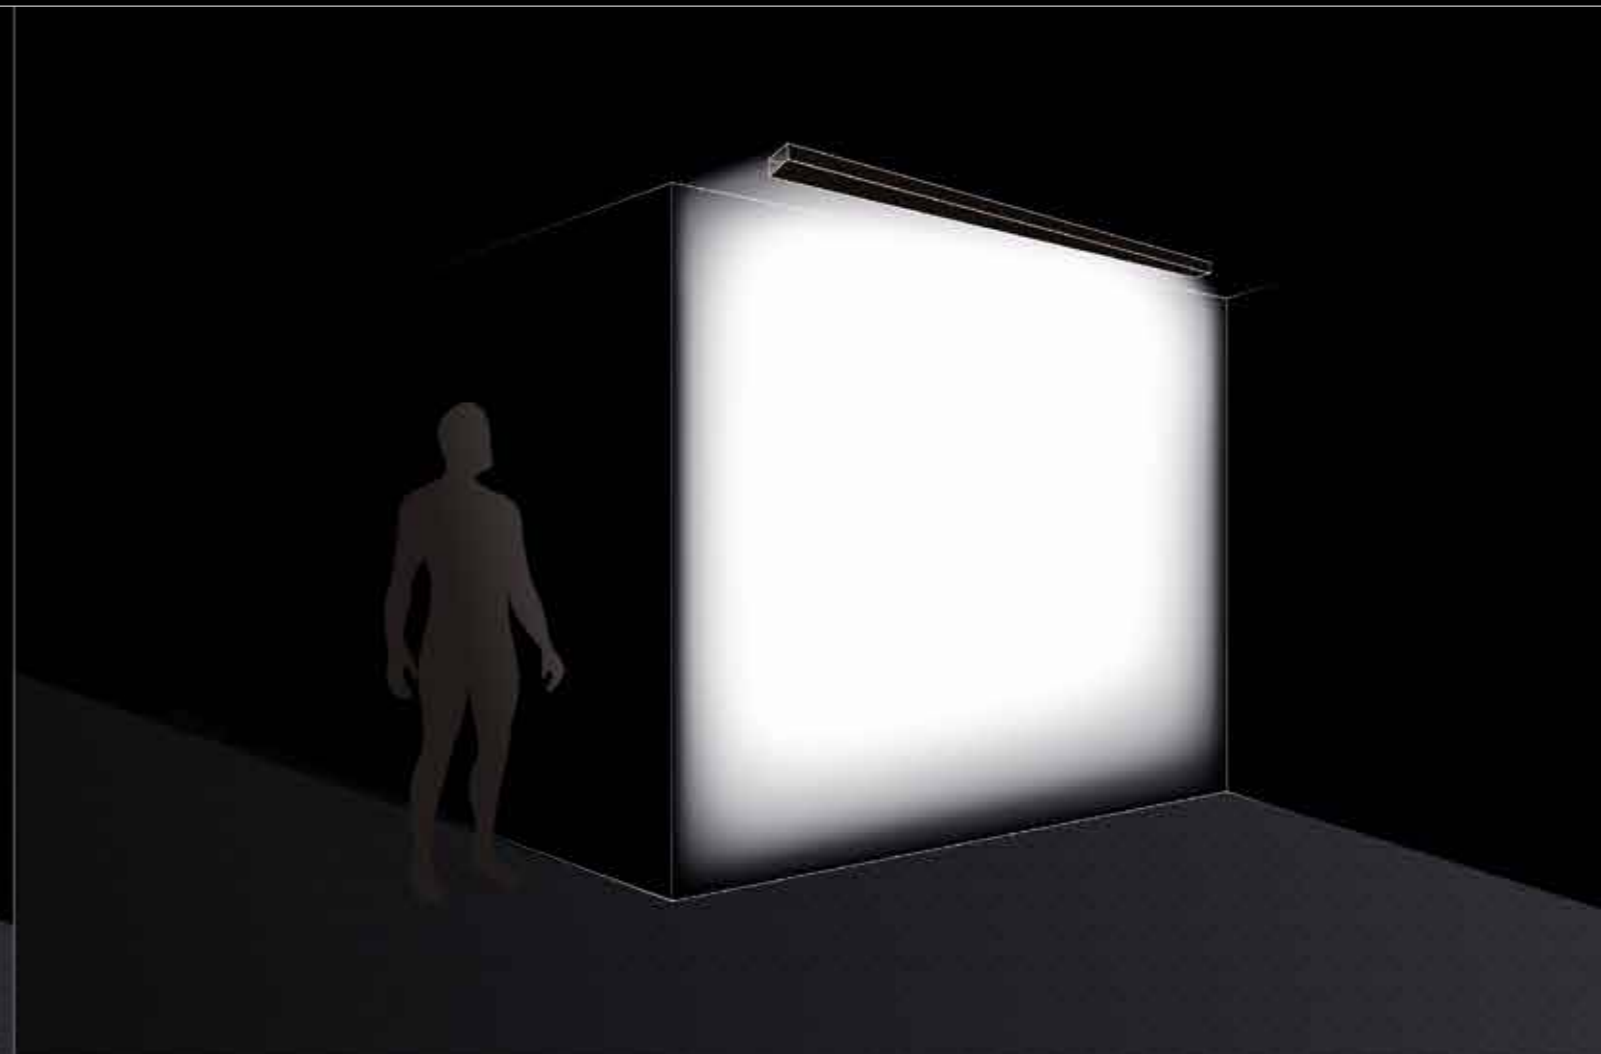

Perfect  
Vertical Cut-off

# ELITE SURFACE Downlight

These ceiling-mounted downlight fixtures are built out of modular and linkable sections for general illumination, placing the driver remotely.




Warranty 5 years

Colors Available



Modular and linkable to the desired length

Max Lamp Lumen :	1764 lm
System Wattage :	20 W (max)
DC Current :	500 mA
Efficiency :	72% (approx)
Input :	220 - 240V ~ 50/60 Hz
CCT (K) :	2200K - 5700K
Driver :	Remote Electronic
Tunable & Dimmable :	On Request
Beam Angle :	C0/180 FWTM/FWHM 68°/48° C90/270 FWTM/FWHM 82°/53°
UGR Value	< 19
CRI :	97 (max)

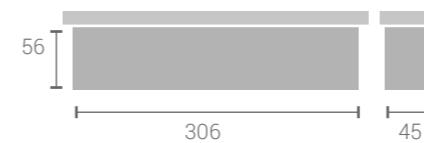

All dimensions are in mm

For product ordering codes and installation refer to end pages

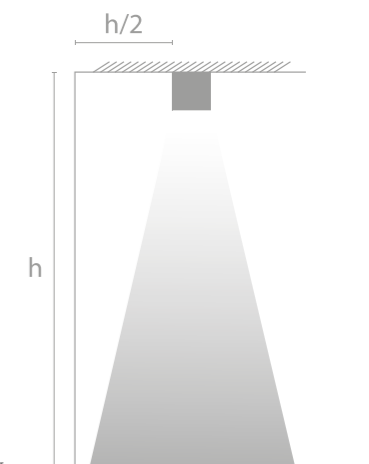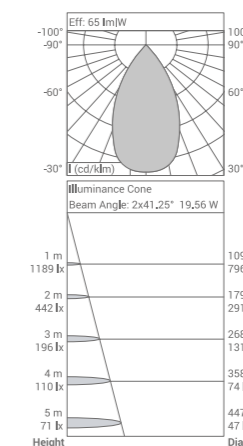

# ELITE SURFACE

## Wallwasher

These ceiling-mounted wallwasher fixtures are built out of modular and linkable sections to illuminate the intended area with uniform distribution, placing the driver remotely.




Warranty 5 years

Colors Available


Modular and linkable to the desired length

Max Lamp Lumen : 1764 lm  
 System Wattage : 20 W (max)  
 DC Current : 500 mA  
 Efficiency : 72% (approx)  
 Input : 220 - 240V ~ 50/60 Hz  
 CCT (K) : 2200K - 5700K  
 Driver : Remote Electronic  
 Tunable & Dimmable : On Request  
 Beam Angle : 90° longitudinal direction wall  
 5°-90° towards wall  
 UGR Value < 19  
 CRI : 97 (max)

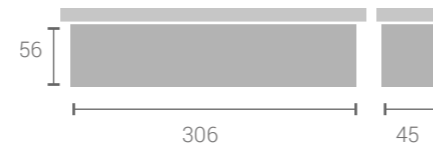

All dimensions are in mm

For product ordering codes and installation refer to end pages

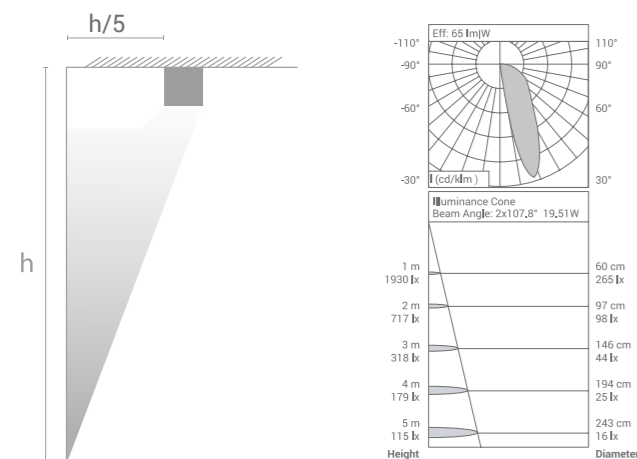

# ELITE SURFACE

## Downlight and Wallwasher

These uniquely scalable ceiling-mounted fixtures come with dual functionality of downlights as well as wallwashers for maximum efficiency, placing the driver remotely.




Warranty 5 years

Colors Available


Modular and linkable to the desired length

Max Lamp Lumen : 1764 lm  
 System Wattage : 20 W (max)  
 DC Current : 500 mA  
 Efficiency : 72% (approx)  
 Input : 220 - 240V ~ 50/60 Hz  
 CCT (K) : 2200K - 5700K  
 Driver : Remote Electronic  
 Tunable & Dimmable : On Request  
 Beam Angle : 120° longitudinal direction wall  
 0-90° towards wall  
 0-30° towards room  
 UGR Value < 19  
 CRI : 97 (max)

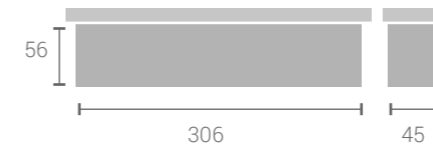

All dimensions are in mm

For product ordering codes and installation refer to end pages

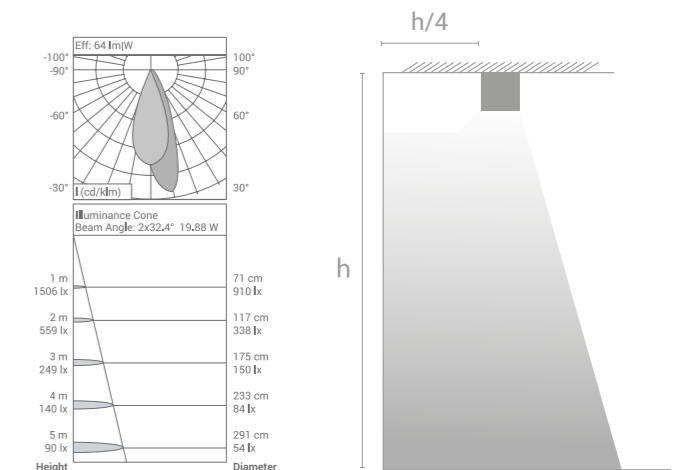

# ELITE SURFACE

## Downlight (with Integrated Driver)

These ceiling-mounted downlight fixtures are built out of modular and linkable sections for general illumination, with an integrated driver attachment.




Warranty 5 years


Colors Available

Modular and linkable to the desired length

- Max Lamp Lumen : 1764 lm
- System Wattage : 20 W (max)
- DC Current : 500 mA
- Efficiency : 72% (approx)
- Input : 220 - 240V ~ 50/60 Hz
- CCT (K) : 2200K - 5700K
- Driver : Integrated Electronic
- Tunable & Dimmable : On Request
- Beam Angle : C0/180 FWTM/FWHM 68°/48°  
C90/270 FWTM/FWHM 82°/53°
- UGR Value < 19
- CRI : 97 (max)

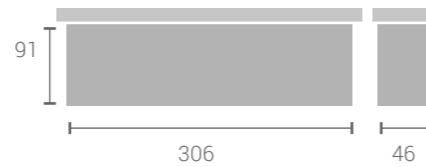

All dimensions are in mm  
For product ordering codes and installation refer to end pages

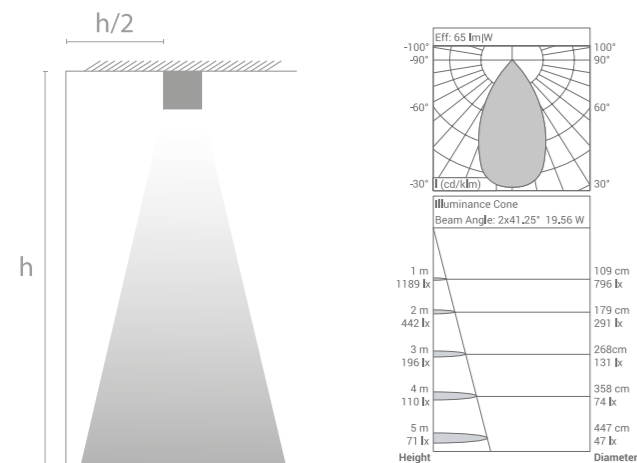

# ELITE SURFACE

## Wallwasher (with Integrated Driver)

These ceiling-mounted wallwasher fixtures are built out of modular and linkable sections to illuminate the intended area with uniform distribution, with an integrated driver attachment.




Warranty 5 years


Colors Available

Modular and linkable to the desired length

- Max Lamp Lumen : 1764 lm
- System Wattage : 20 W (max)
- DC Current : 500 mA
- Efficiency : 72% (approx)
- Input : 220 - 240V ~ 50/60 Hz
- CCT (K) : 2200K - 5700K
- Driver : Integrated Electronic
- Tunable & Dimmable : On Request
- Beam Angle : 90° longitudinal direction wall  
5°-90° towards wall
- UGR Value < 19
- CRI : 97 (max)

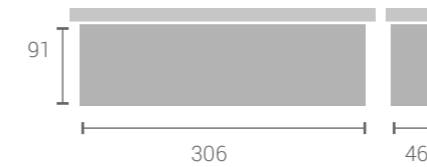

All dimensions are in mm  
For product ordering codes and installation refer to end pages

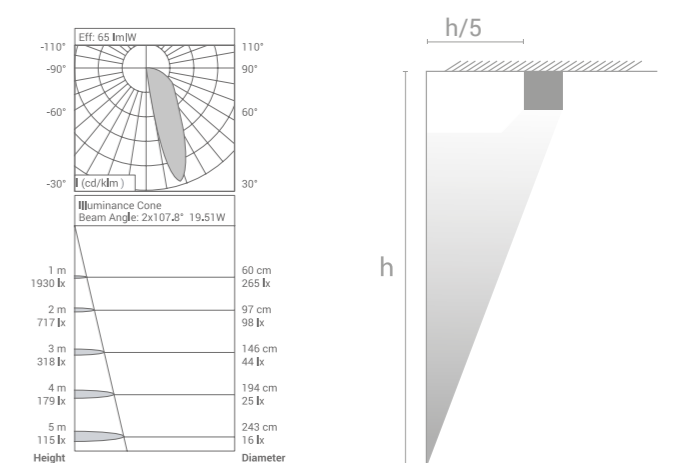



# ELITE SURFACE

## Downlight and Wallwasher (with Integrated Driver)

These uniquely scalable ceiling-mounted fixtures come with dual functionality of downlights as well as wallwashers for maximum efficiency, with an integrated driver attachment.




Warranty 5 years

Colors Available


Modular and linkable to the desired length

- Max Lamp Lumen : 1764 lm
- System Wattage : 20 W (max)
- DC Current : 500 mA
- Efficiency : 72% (approx)
- Input : 220 - 240V ~ 50/60 Hz
- CCT (K) : 2200K - 5700K
- Driver : Integrated Electronic
- Tunable & Dimmable : On Request
- Beam Angle : 120° longitudinal direction wall  
0-90° towards wall  
0-30° towards room
- UGR Value < 19
- CRI : 97 (max)

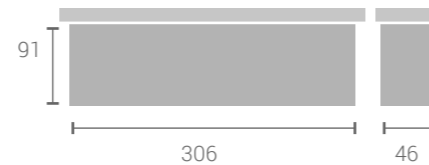

All dimensions are in mm

For product ordering codes and installation refer to end pages

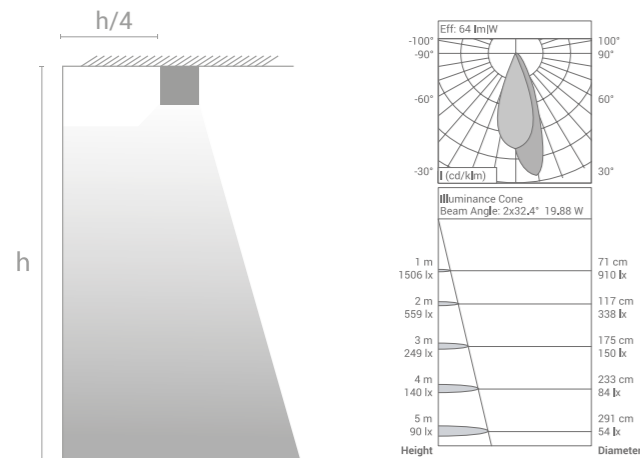

# ELITE RECESSED

## Downlight

These downlight luminaires, installed above the ceiling achieve general illumination with a seamless finish.



Warranty 5 years

Colors Available


Modular and linkable to the desired length

- Max Lamp Lumen : 1764 lm
- System Wattage : 20 W (max)
- DC Current : 500 mA
- Efficiency : 72% (approx)
- Input : 220 - 240V ~ 50/60 Hz
- CCT (K) : 2200K - 5700K
- Driver : Remote Electronic
- Tunable & Dimmable : On Request
- Beam Angle : C0/180 FWTM/FWHM 68°/48°  
C90/270 FWTM/FWHM 82°/53°
- UGR Value < 19
- CRI : 97 (max)



Surface Cutout: 396 X 60 mm  
Height from the ceiling is adjustable upto 10mm  
(As per requirement shown by dotted lines)  
All dimensions are in mm

For product ordering codes and installation refer to end pages

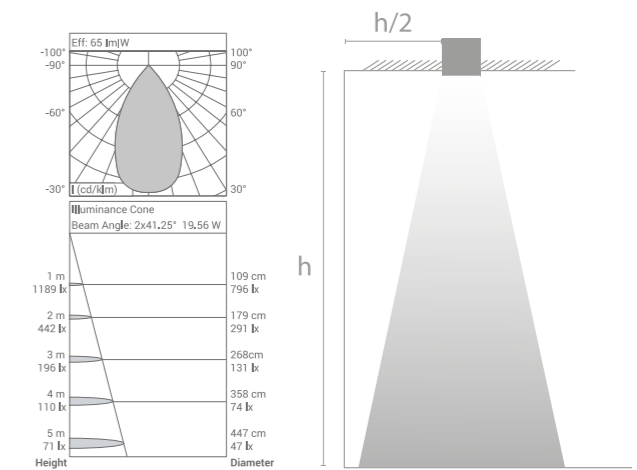

# ELITE RECESSED Wallwasher

These uniquely scalable fixtures, installed above the ceiling to illuminate the intended area with uniform distribution.



Warranty 5 years

Colors Available



Modular and linkable to the desired length

Max Lamp Lumen : 1764 lm  
 System Wattage : 20 W (max)  
 DC Current : 500 mA  
 Efficiency : 72% (approx)  
 Input : 220 - 240V ~ 50/60 Hz  
 CCT (K) : 2200K - 5700K  
 Driver : Remote Electronic  
 Tunable & Dimmable : On Request  
 Beam Angle : 90° longitudinal direction wall  
 5°-90° towards wall  
 UGR Value < 19  
 CRI : 97 (max)



Surface Cutout: 396 X 60 mm  
 Height from the ceiling is adjustable upto 10mm  
 (As per requirement shown by dotted lines)  
 All dimensions are in mm

For product ordering codes and installation refer to end pages

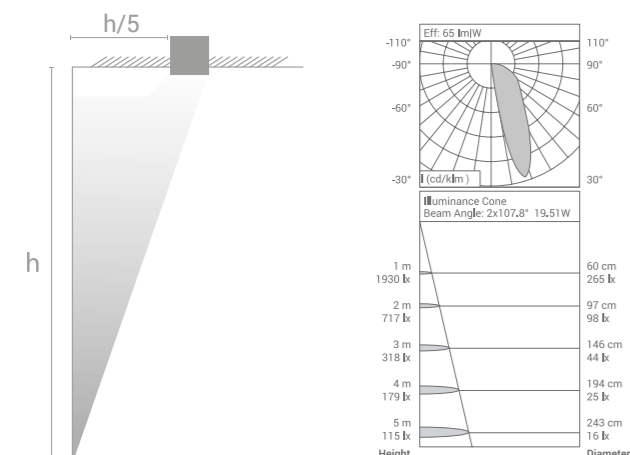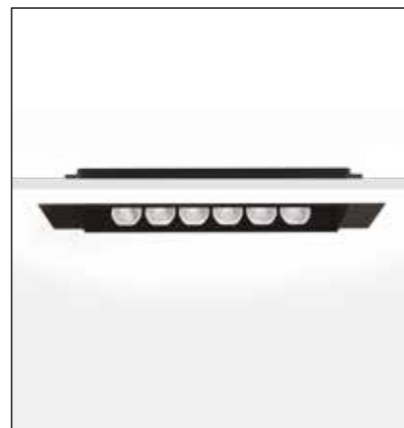

# ELITE RECESSED Downlight and Wallwasher

These recessed luminaires are built out of modular and linkable sections to achieve the dual functionality of downlights and wallwashers.



Warranty 5 years

Colors Available


Modular and linkable to the desired length

Max Lamp Lumen : 1764 lm  
 System Wattage : 20 W (max)  
 DC Current : 500 mA  
 Efficiency : 72% (approx)  
 Input : 220 - 240V ~ 50/60 Hz  
 CCT (K) : 2200K - 5700K  
 Driver : Remote Electronic  
 Tunable & Dimmable : On Request  
 Beam Angle : 120° longitudinal direction wall  
 0-90° towards wall  
 0-30° towards room  
 UGR Value < 19  
 CRI : 97 (max)



Surface Cutout: 396 X 60 mm  
 Height from the ceiling is adjustable upto 10mm  
 (As per requirement shown by dotted lines)  
 All dimensions are in mm

For product ordering codes and installation refer to end pages

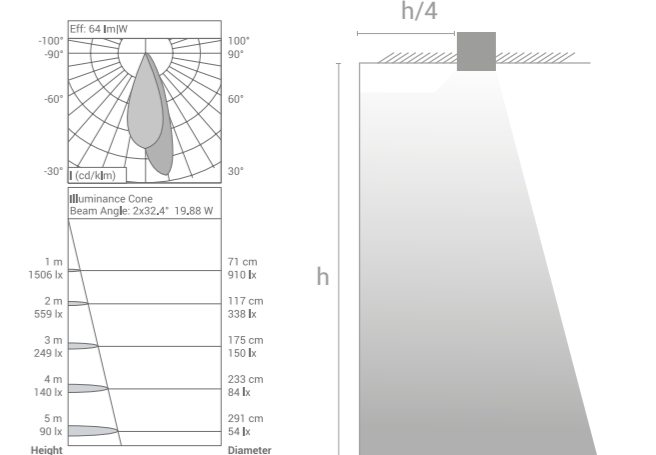

# Product Ordering Code (by application)

## ELITE

SURFACE	Item Description	Output (Lumens)	Watt (Max)	DC Current (mA)	Dimensions (mm)	Cutout (mm)	Tunable	Dimmable	Page No.	
	PL05882-White-DL PL05947-Black-DL PL06012-Silver-DL	1764	20	500	306 * 45 * 58	-	On Request	On Request	89	
	PL05883-White-DL & WW PL05948-Black-DL & WW PL06013-Silver-DL & WW	1764	20	500	306 * 45 * 58	-	On Request	On Request	91	
	PL05884-White-WW PL05949-Black-WW PL06014-Silver-WW	1764	20	500	306 * 45 * 58	-	On Request	On Request	90	
	<b>WITH INTEGRATED DRIVER</b>									
	PL05885-White-DL PL05950-Black-DL PL06015-Silver-DL	1764	20	500	306 * 46 * 91	-	On Request	On Request	92	
	PL05886-White-DL & WW PL05951-Black-DL & WW PL06016-Silver-DL & WW	1764	20	500	306 * 46 * 91	-	On Request	On Request	94	
	PL05887-White-WW PL05952-Black-WW PL06017-Silver-WW	1764	20	500	306 * 46 * 91	-	On Request	On Request	93	

Driver- Remote Electronic



Driver- Integrated Electronic



RECESSED	Item Description	Output (Lumens)	Watt (Max)	DC Current (mA)	Dimensions (mm)	Cutout (mm)	Tunable	Dimmable	Page No.
	PL05888-White-DL PL05953-Black-DL PL06018-Silver-DL	1764	20	500	391 * 70 * 60	396 * 60	On Request	On Request	95
	PL05889-White-DL & WW PL05954-Black-DL & WW PL06019-Silver-DL & WW	1764	20	500	391 * 70 * 60	396 * 60	On Request	On Request	97
	PL05890-White-WW PL05955-Black-WW PL06020-Silver-WW	1764	20	500	391 * 70 * 60	396 * 60	On Request	On Request	96

Driver- Remote Electronic





# The Value of Trust

We believe trust is to be earned. At the backbone of our customer experience is the firm commitment to foster faith, reliability and safety. Our certifications affirm the honest and thorough assessment of all our offerings.

Our standard 5 years warranty for all products serves as the promise of efficiency

## Certifications



**ISO 9001** is the standard to which our Quality Management System is certified to enable consistent processes to ensure safe and reliable products.




**IECEE CB** scheme is the world's first international system for the mutual acceptance of product safety test reports and certificates for electrical and electronic equipment, devices and components.




**CE Mark** is manufacturer's declaration that products meet the requirements of the applicable European Directives related to health, safety and environmental protection standards.



**RoHS** is the directive on the restriction on the use of certain hazardous substances in electrical and electronic equipment.



**IP20** confirms touch safe design with protection against solid objects up to 12 mm.



**IP45** confirms protection against solid objects over 1 mm and limited liquid ingress protection.

info@pluslighttech.com | www.pluslighttech.com | +91-22-2686 5671 | Toll Free 1800 120 111 999  
Disclaimer: Dimension and fixture design can be changed without prior notice