


PERDU

Power of the invisible

Discover the wonder of lighting with its source so obscure, it hides in plain sight to enhance the observed surroundings.

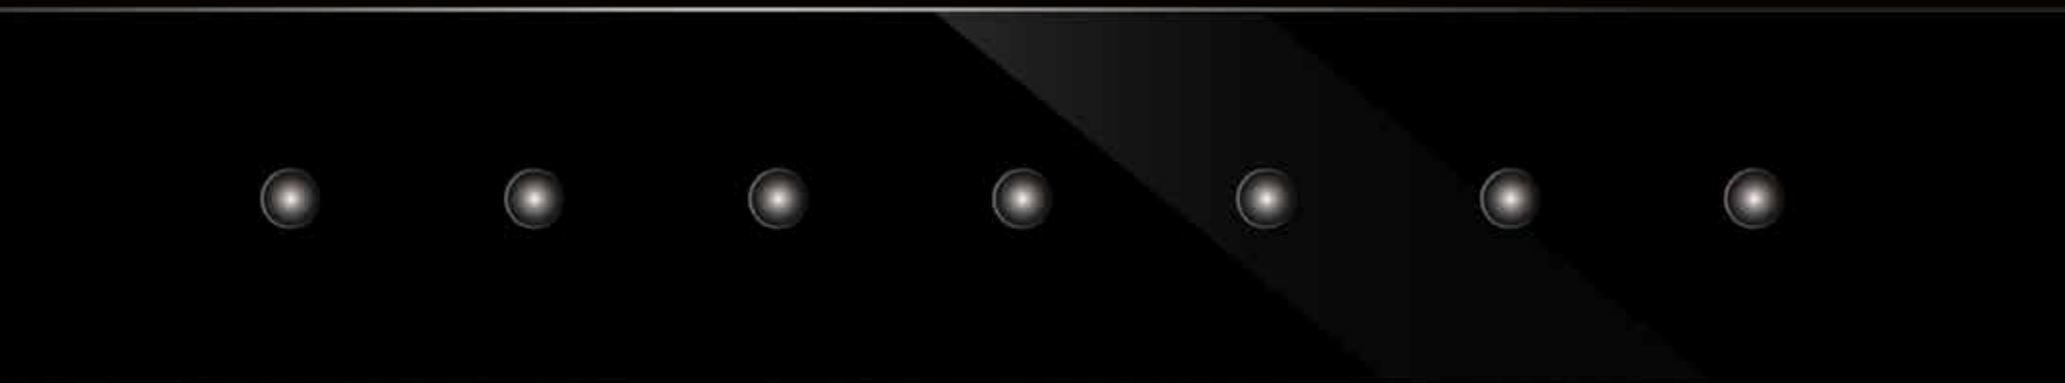

PERDU ONE

Recessed | Downlight

A state-of-the-art ceiling recessed luminaire for a more muted source of light that offers unparalleled visual comfort.




Warranty 5 years

Colors Available





Max Lamp Lumen :	640 lm
System Wattage :	7.5 W (max)
DC Current :	500 mA
Efficiency :	~70%
Input :	220 - 240V ~ 50/60 Hz
CCT (K) :	2200K - 5700K
Driver :	Remote Electronic
Tunable :	No
Dimmable :	On Request
Beam Angle :	FWTM/FWHM 47°/35° (Narrow) FWTM/FWHM 80°/57° (Wide)
UGR Value	< 17
CRI :	97 (max)

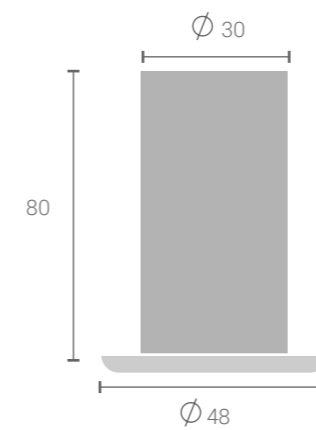

Cutout Diameter : 43 mm
All dimensions are in mm

For product ordering codes and installation refer to end pages

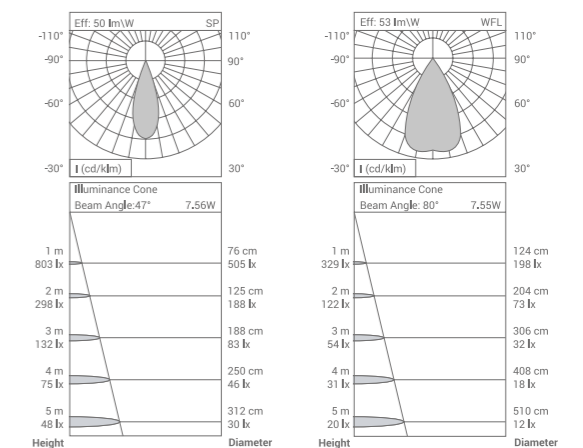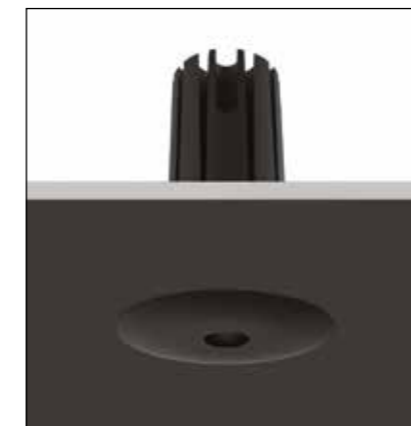

PERDU ONE

Deep Recessed | Downlight


A state-of-the-art ceiling deep recessed luminaire for a more muted source of light that offers unparalleled visual comfort.



Warranty 5 years


Colors Available

Max Lamp Lumen :	640 lm
System Wattage :	7.5 W (max)
DC Current :	500 mA
Efficiency :	~70%
Input :	220 - 240V ~ 50/60 Hz
CCT (K) :	2200K - 5700K
Driver :	Remote Electronic
Tunable :	No
Dimmable :	On Request
Beam Angle :	FWTM/FWHM 48°/35° (Narrow) FWTM/FWHM 78°/53° (Wide)
UGR Value	< 17
CRI :	97 (max)

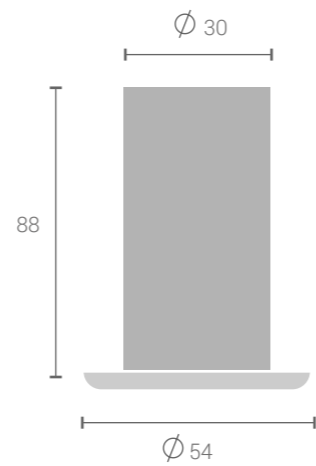

Cutout Diameter : 43 mm
All dimensions are in mm

For product ordering codes and installation refer to end pages

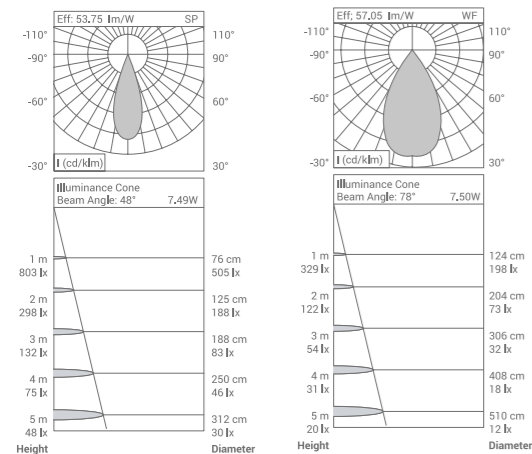

PERDU ONE

Trimless | Downlight


A ceiling recessed luminaire that achieves a pristine integration with the ceiling for a minimal and refined look.



Warranty 5 years


Colors Available

Max Lamp Lumen :	640 lm
System Wattage :	7.5 W (max)
DC Current :	500 mA
Efficiency :	~70%
Input :	220 - 240V ~ 50/60 Hz
CCT (K) :	2200K - 5700K
Driver :	Remote Electronic
Tunable :	No
Dimmable :	On Request
Beam Angle :	FWTM/FWHM 47°/35° (Narrow) FWTM/FWHM 80°/57° (Wide)
UGR Value	< 17
CRI :	97 (max)

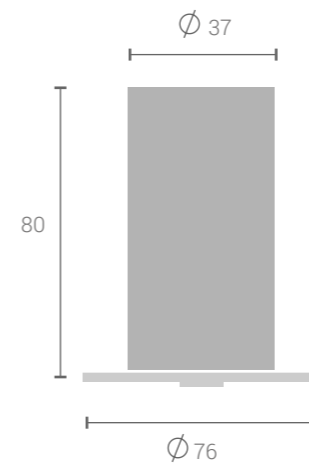

Cutout Diameter : 40 mm
All dimensions are in mm

For product ordering codes and installation refer to end pages

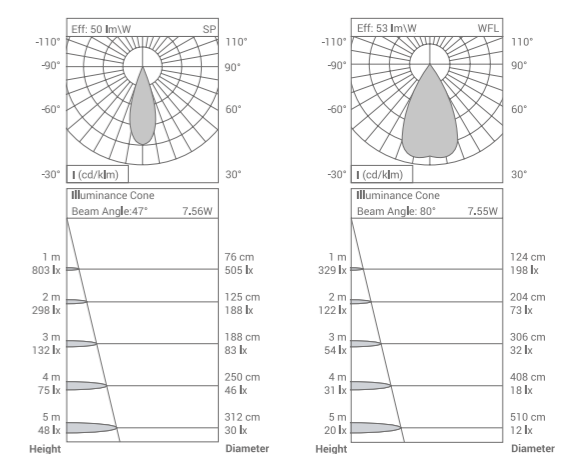

PERDU LINEAR

Surface | 4x

The Perdu Linear Surface Mounted lighting fixtures are designed to achieve a very unique and appealing lighting aesthetic by creating a near invisible source of light. Perdu linear offers luminaire solutions that are modular and linkable to the desired length.



Warranty 5 years


Colors Available

Max Lamp Lumen :	1400 lm
System Wattage :	14 W (max)
DC Current :	500 mA
Efficiency :	~70%
Input :	220 - 240V ~ 50/60 Hz
CCT (K) :	2200K - 5700K
Driver :	Remote Electronic
Tunable & Dimmable :	On Request
Beam Angle :	FWTM/FWHM 47°/35° (Narrow) FWTM/FWHM 79°/58° (Wide)
UGR Value	< 17
CRI :	97 (max)
Available Configuration :	1x, 2x, 4x (Modular and linkable to the desired length)



All dimensions are in mm

For product ordering codes and installation refer to end pages

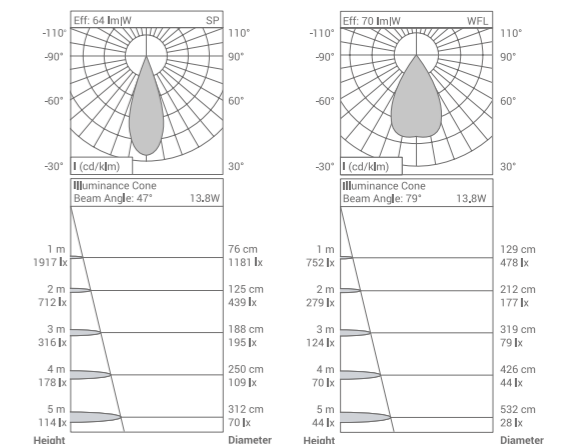

PERDU LINEAR

Trimless | 4x (Wooden & Gypsum Ceiling)

The Perdu downlight linear trimless lighting fixtures are designed to achieve a very unique and appealing lighting aesthetic by creating a near invisible source of light while delivering stellar light quality. This range offers luminaire solutions that are modular and linkable to the desired length.



PERDU LINEAR

Trimless | 4x (Metal Ceiling)


The Perdu downlight linear trimless lighting fixtures are designed to achieve a very unique and appealing lighting aesthetic by creating a near invisible source of light while delivering stellar light quality. This range offers luminaire solutions that are modular and linkable to the desired length.





Warranty 5 years

Colors Available

Max Lamp Lumen :	1400 lm
System Wattage :	14 W (max)
DC Current :	500 mA
Efficiency :	~70%
Input :	220 - 240V ~ 50/60 Hz
CCT (K) :	2200K - 5700K
Driver :	Remote Electronic
Tunable & Dimmable :	On Request
Beam Angle :	FWTM/FWHM 47°/35° (Narrow) FWTM/FWHM 79°/58° (Wide)
UGR Value	< 17
CRI :	97 (max)
Available Configuration :	1x, 2x, 4x (Modular and linkable to the desired length)

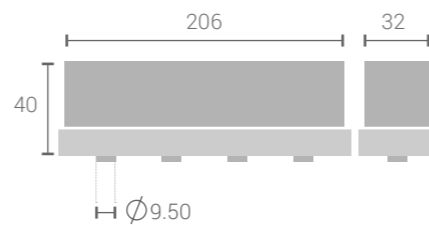


Cutout Diameter : 10.5 mm
All dimensions are in mm
For product ordering codes and installation refer to end pages
Finishes Available

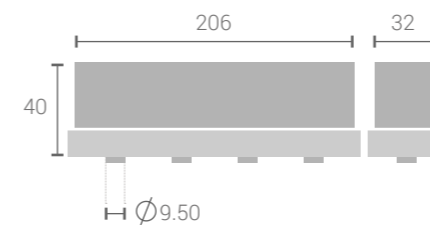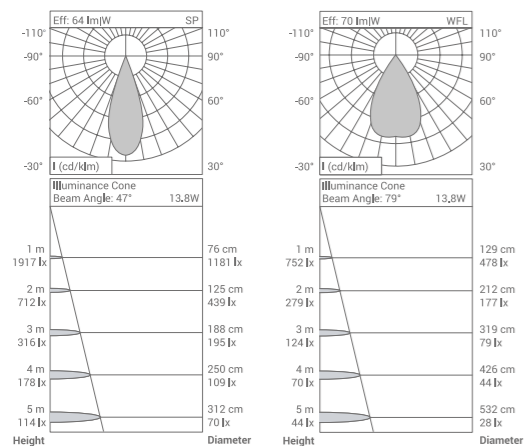

Cutout Diameter : 10.5 mm
All dimensions are in mm
For product ordering codes and installation refer to end pages


Finish Available

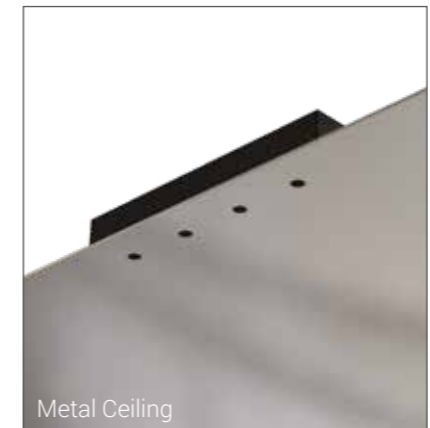

Warranty 5 years

Colors Available

Max Lamp Lumen :	1400 lm
System Wattage :	14 W (max)
DC Current :	500 mA
Efficiency :	~70%
Input :	220 - 240V ~ 50/60 Hz
CCT (K) :	2200K - 5700K
Driver :	Remote Electronic
Tunable & Dimmable :	On Request
Beam Angle :	FWTM/FWHM 47°/35° (Narrow) FWTM/FWHM 79°/58° (Wide)
UGR Value	< 17
CRI :	97 (max)
Available Configuration :	1x, 2x, 4x (Modular and linkable to the desired length)

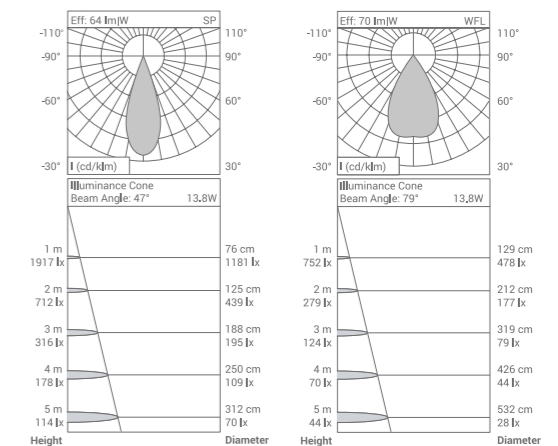

Product Ordering Code (by application)

PERDU ONE

RECESSED	Item Description	Output (Lumens)	Watt (Max)	DC Current (mA)	Dimensions (mm)	Cutout (mm)	Tunable	Dimmable	Page No.
	FLUSHED								
	PL05891-White-Narrow PL05956-Black-Narrow PL05892-White-Wide PL05957-Black-Wide	640	7.5	500	Ø48 * 80	Ø43	No	On Request	73
DEEP									
	PL05893-White-Narrow PL05958-Black-Narrow PL05894-White-Wide PL05959-Black-Wide	640	7.5	500	Ø54 * 88	Ø43	No	On Request	74
TRIMLESS									
	PL05895-White-Narrow PL05960-Black-Narrow PL05896-White-Wide PL05961-Black-Wide	640	7.5	500	Ø76 * 80	Ø40	No	On Request	75

PERDU LINEAR


SURFACE	Item Description	Output (Lumens)	Watt (Max)	DC Current (mA)	Dimensions (mm)	Cutout (mm)	Tunable	Dimmable	Page No.
	WOODEN								
	PL05897-White-Narrow PL05962-Black-Narrow PL05898-White-Wide PL05963-Black-Wide	1400	14	500	206 * 32 * 41	-	On Request	On Request	77
TRIMLESS									
	PL05899-White-Narrow PL05964-Black-Narrow PL05900-White-Wide PL05965-Black-Wide	1400	14	500	206 * 32 * 41	-	On Request	On Request	78
GYPSUM									
	PL05901-White-Narrow PL05966-Black-Narrow PL05902-White-Wide PL05967-Black-Wide	1400	14	500	206 * 32 * 41	-	On Request	On Request	78
METAL									
	PL05903-White-Narrow PL05968-Black-Narrow PL05904-White-Wide PL05969-Black-Wide	1400	14	500	206 * 32 * 41	-	On Request	On Request	79

Driver- Remote Electronic

1x Recessed

1x Deep Recessed

1x Trimless



Driver- Remote Electronic

Linear

Linear Wooden, Gypsum & Metal Ceiling



The Value of Trust

We believe trust is to be earned. At the backbone of our customer experience is the firm commitment to foster faith, reliability and safety. Our certifications affirm the honest and thorough assessment of all our offerings.

Our standard 5 years warranty for all products serves as the promise of efficiency

Certifications



ISO 9001 is the standard to which our Quality Management System is certified to enable consistent processes to ensure safe and reliable products.




IECEE CB scheme is the world's first international system for the mutual acceptance of product safety test reports and certificates for electrical and electronic equipment, devices and components.




CE Mark is manufacturer's declaration that products meet the requirements of the applicable European Directives related to health, safety and environmental protection standards.



RoHS is the directive on the restriction on the use of certain hazardous substances in electrical and electronic equipment.



IP20 confirms touch safe design with protection against solid objects up to 12 mm.



IP45 confirms protection against solid objects over 1 mm and limited liquid ingress protection.

info@pluslighttech.com | www.pluslighttech.com | +91-22-2686 5671 | Toll Free 1800 120 111 999
Disclaimer: Dimension and fixture design can be changed without prior notice