


ARRAY PRO

Recessed | 4x Downlight

Introducing ceiling-recessed downlights that highlight the desired subject or place and provide optimum illumination. These downlights are well suited for ambient lighting in an environment.




Colors Available



System Lumen :	1510 - 1989 lm
System Wattage :	24 W (max)
DC Current :	850 mA
Efficiency :	>75-90%
Efficacy :	64 - 84 lm/W
CCT (K) :	2200K - 6500K
CRI :	>80 & 90 +
Mcadam :	3SDCM
Lifetime :	L80/B10(>50,000 hrs@Ta 30°C)
Beam Angle :	FWTM/FWHM 46°/35° FWTM/FWHM 70°/53° FWTM/FWHM 98°/84°
UGR Value	< 10/ 13.5/ 22.5


Driver Specs:

Input :	220 - 240V ~ 50/60 Hz
Integration :	Non - Integrated
Tunable :	Yes
Dimmable :	Yes
Available on Request :	On-Off/ Dali 2.0/ DT8.0/ AD/ TD

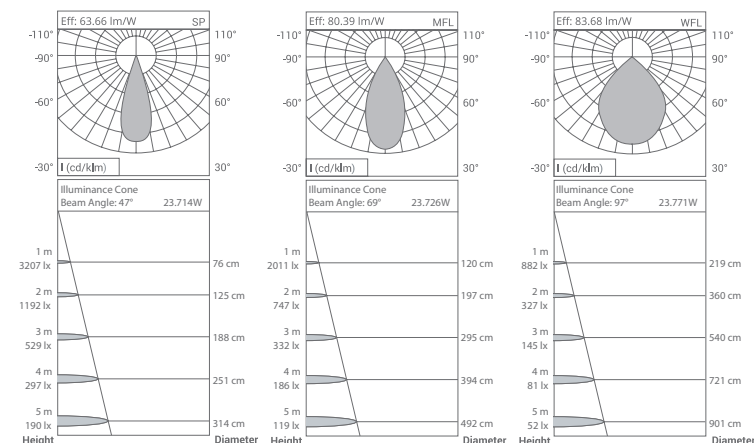

Warranty 5 years

BLE SMART

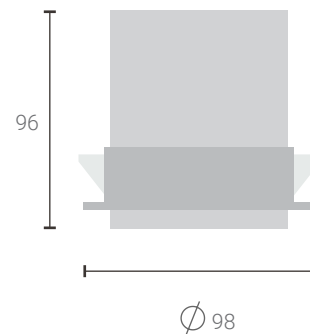

Cutout Diameter : 84 mm
All dimensions are in mm

For product ordering codes and installation refer to end pages

