


EOS WALLWASHER


Recessed

Introducing ceiling-recessed downlight and wallwasher that highlight the desired subject or place and provide optimum illumination by being nondescript. These minimal, but indispensable range of downlights are well suited for ambient lighting in an environment.



Warranty 5 years

BLE SMART

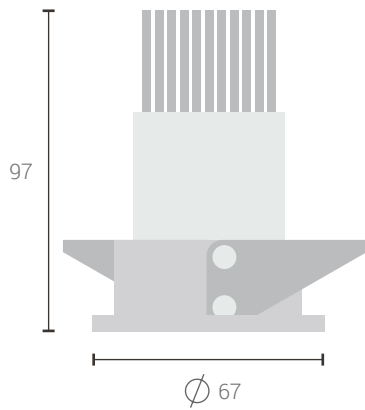

Cutout Diameter : 63 mm

All dimensions are in mm

For product ordering codes and installation refer to end pages



Colors Available



System Lumen :	1037 lm
System Wattage :	12.5 W (max)
DC Current :	290 mA
Efficiency :	>75-90%
Efficacy :	85 lm/W
CCT (K) :	3000K - 4000K
CRI :	>80 & 90 +
Mcadam :	3SDCM
Lifetime :	L80/B10(>50,000 hrs@Ta 30°C)
Beam Angle :	Asymmetric (Down + Wall)
UGR Value	< 15.4
Driver Specs:	
Input :	220 - 240V ~ 50/60 Hz
Integration :	Integrated
Tunable :	Yes
Dimmable :	Yes
Available on Request :	On-Off/ Dali 2.0/ DT8.0/ AD/ TD

