

NANO | TECHNICAL DETAILS



Available Colors: Black White



5 Years
Warranty

DALI Protocol

BLE Smart

Dimmable



Tuneable



	Nano 2x Downlight	Nano 4x Downlight
Ip Rating :	IP 20	IP 20
System Lumen :	335 lm	778 lm
System Wattage :	7 W	14 W
DC Current :	500 mA	500 mA
Efficiency :	> 75 - 90%	> 75 - 90%
Efficacy :	48 lm/W	57 lm/W
CCT (K) :	2200K - 5700K	2200K - 5700K
CRI :	> 80 & 90 +	> 80 & 90 +
Mcadam :	3SDCM	3SDCM
Lifetime :	L80/B10 (>50,000 HRS@Ta 30°C)	
Beam Angle :	FWTM - 34°/ 59°	FWTM - 34°/ 59°
	FWHM - 49°/ 80°	FWHM - 49°/ 80°
UGR Value :	< 10	< 10/ 15.1

DRIVER SPECIFICATIONS

Input :	220 - 240V ~ 50/60 Hz	
Integration :	Non - Integrated	Non - Integrated
Tunable :	Yes	Yes
Dimmable :	Yes	Yes
Driver Type :	On-Off/ Dali 2.0/ DT8.0/ AD/ TD	

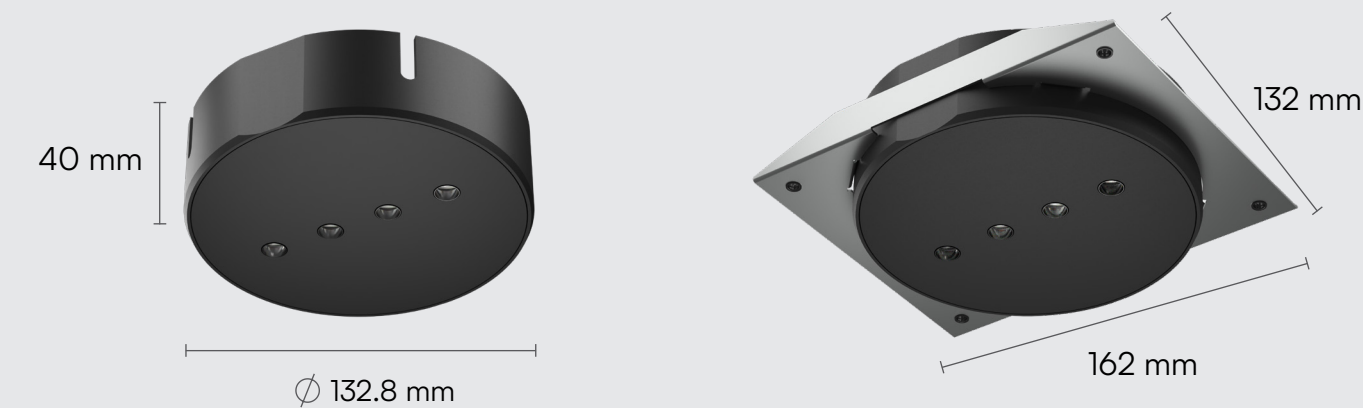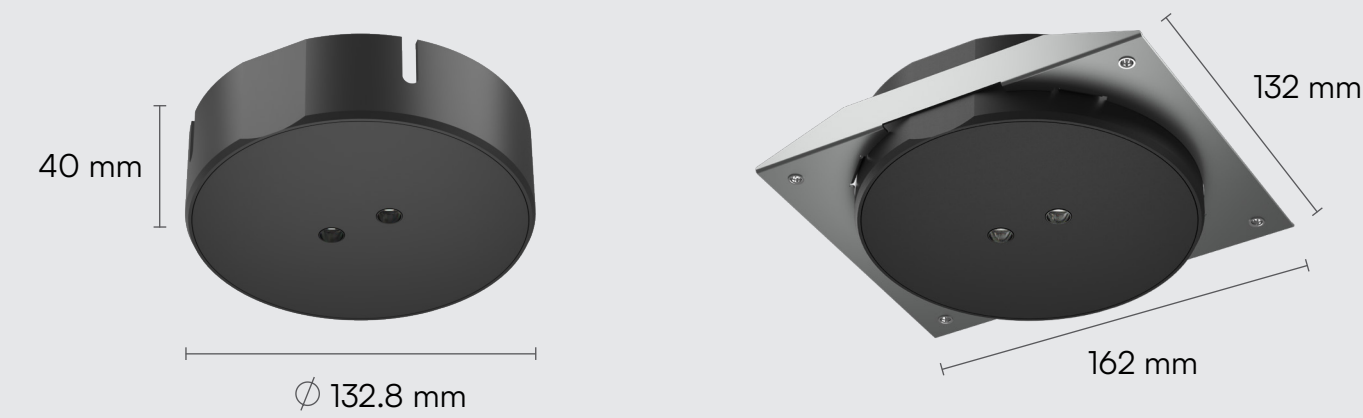

All dimensions are in mm

