

# MAGNUS

## Recessed

Introducing ceiling-recessed downlights that highlight the desired subject or place and provide optimum illumination by being nondescript. These minimal, but indispensable range of downlights are well suited for ambient lighting in an environment.



Colors Available



System Lumen :	393 - 448 lm
System Wattage :	6 W (max)
DC Current :	350 mA
Efficiency :	>75-90%
Efficacy :	72-81 lm/W
CCT (K) :	2200K - 6500K
CRI :	>80 & 90 +
Mcadam :	3SDCM
Lifetime :	L80/B10(> 50,000 hrs@Ta 30°C)
Beam Angle :	FWTM/FWHM 45°/33° (Narrow) FWTM/FWHM 61°/38° (Medium) FWTM/FWHM 85°/70° (Wide)
UGR Value	< 10/14.8/28.1


### Driver Specs:

Input :	220 - 240V ~ 50/60 Hz
Integration :	Non - Integrated
Tunable :	No
Dimmable :	Yes
Available on Request :	On-Off/ Dali 2.0/ DT8.0/ AD/ TD



Warranty 5 years

**BLE** SMART

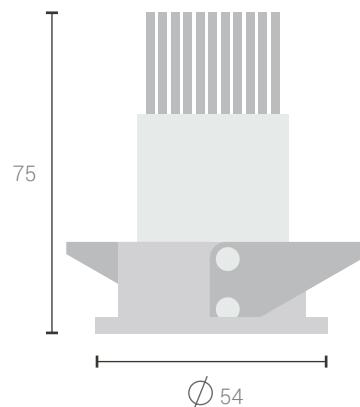

Cutout Diameter : 47 mm

All dimensions are in mm

For product ordering codes and installation refer to end pages

