


ELITE


Surface Downlight

Introducing ceiling-surface downlight that highlight the desired subject or place and provide optimum illumination by being nondescript.

The simplicity of its form provides smooth integration in architectural features.

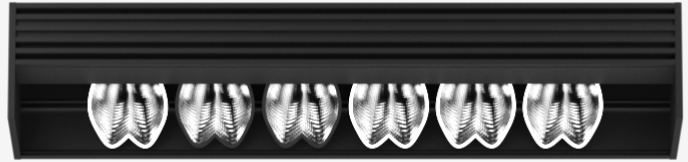

Colors Available



Product Specs :

System Lumen:	1579 - 1726lm
System Wattage:	20W
Efficacy:	82 - 91lm/W
DC Current:	500mA
Efficiency:	>92%
CCT(K):	2700K - 5700K
Macadam:	3SDCM
Lifetime:	L80/B10 (>50,000hrs@Ta-30Deg C)
Beam Angle:	54°
UGR Value:	<19
CRI:	>90



Driver Specs:

Input:	220-240V ~50/60Hz
Integration:	Non - Integrated
THD:	<10%
Driver Type:	On-Off / DALI 2.0 / AD / TD / BLE
Dimmable / Tunable:	On Request



Warranty 5 Years

BLE SMART

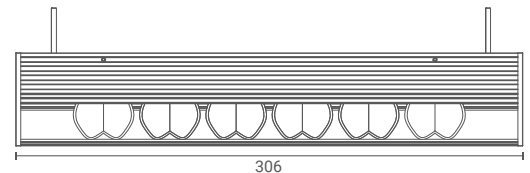

*All Dimensions are in mm.

