


# Dione Cove

## Surface Integrated Downlight


Introducing ceiling- surface Downlight that highlight the desired subject or place and provide optimum illumination by being nondescript.

The simplicity of its form provides smooth integration in architectural features.

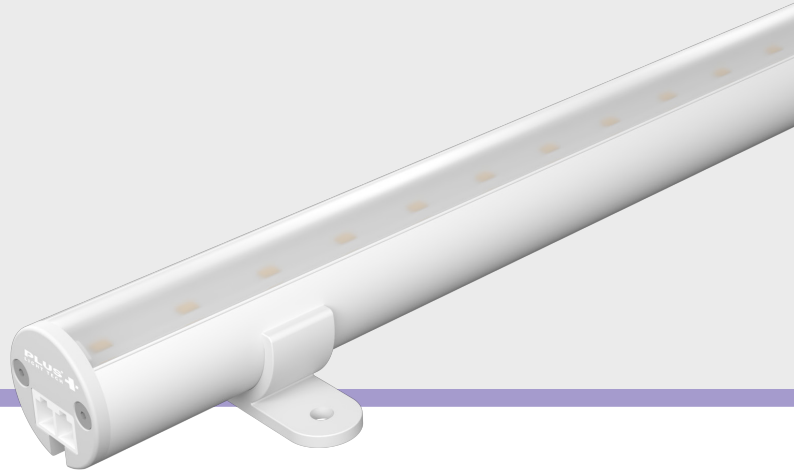

### Product Specs :

|                        |                               |
|------------------------|-------------------------------|
| Model name :           | Dione Cove                    |
| Weight:                | 200gm                         |
| Certificate Available: | Self Declaration Certificates |
| Colors Available:      | White                         |
| System Lumen:          | 887 lm                        |
| System Wattage:        | 9 W                           |
| Constant Voltage:      | 24V                           |
| Efficacy:              | 113 lm/W                      |
| CCT(K) :               | 4000K                         |
| CRI:                   | > 90                          |
| Bining:                | ≤3SDCM                        |
| Lifetime:              | L80/B10 (>50,000hrs@Ta-30°C)  |
| Beam Angle:            | 103°                          |
| IP Rating:             | IP20                          |
| UGR:                   | <28                           |
| Efficiency:            | >65%                          |

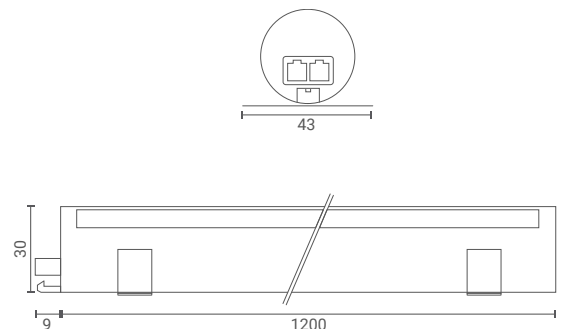

### Driver Specs :

|                     |                              |
|---------------------|------------------------------|
| Input:              | 220-240V ~50/60Hz            |
| Driver Type:        | On-Off/ Dali 2.0/ DT8.0/ BLE |
| THD:                | <10%                         |
| Tunable & Dimmable: | Yes                          |

